


# How to quick test streamer connections?

- 1) On the “Streamer Junction” box, select either PORT or STBD. You can only use one streamer at a time.



- 2) Connect one of the post filter outputs on the amplifier to the oscilloscope. Disconnect the output to the Sun on the back of the amplifier to ensure that no signal over 5 V goes to the Sun.

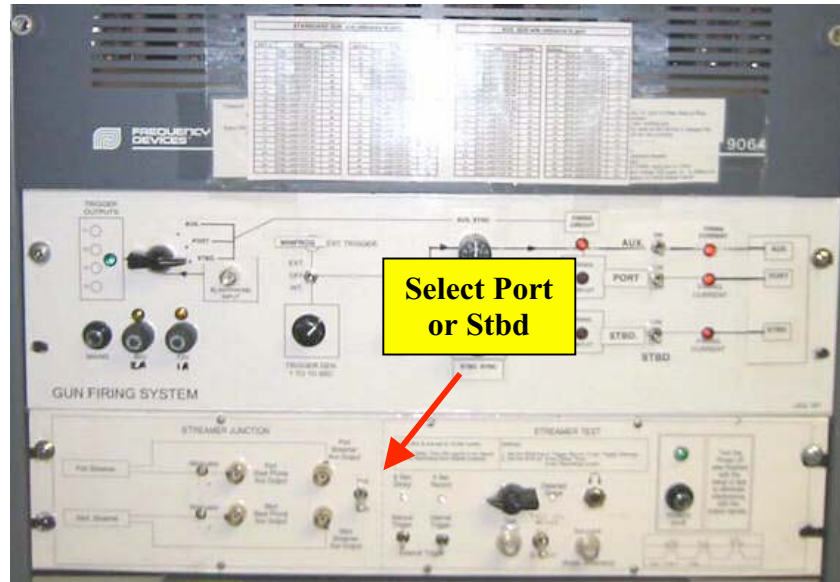

- 3) Set the amplifiers on 30, Gain on 5 and Low Freq Rolloff to 1 Hz.

- 4) Send someone outside to hit the streamer **WINCH SPOOL** (NOT the streamer itself, it is very sensitive!) with a big rubber mallet to create a signal that the streamer can sense and you can then see it on the oscilloscope. See the Oscilloscope Guide for instruction on how to use the oscilloscope.

